(43) International Publication Date 2 December 2004 (02.12.2004)

PCT

(10) International Publication Number WO 2004/104295 A1

(51) International Patent Classification7:

D21F 1/00

(21) International Application Number:

PCT/EP2004/050194

(22) International Filing Date: 24 February 2004 (24.02.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10/443,474

22 May 2003 (22.05.2003) US

2,440,263

9 September 2003 (09.09.2003) C

(71) Applicant (for all designated States except US): VOITH FABRIC PATENT GMBH [DE/DE]; St. Poeltener Str. 43, 89522 Heidenheim (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): QUIGLEY, Scott [US/US]; 108 Paradise Circle, Townville, SC 29689 (US). BREWSTER, James [US/US]; 159 Private Road, Waskom, TX 1139 (US). (81) Designated States (unless otherwise indicated, for every kind of national protection available): AF, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WARP BOUND COMPOSITE PAPERMAKING FABRIC

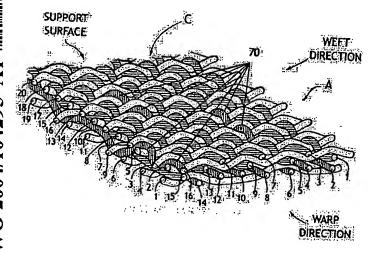

(57) Abstract: A composite papermaking fabric comprising an upper support fabric and a lower contact fabric. The upper fabric is formed of warp yams, fabric born warp yams and weft yams interwoven to provide the upper fabric with a support surface forming a one up, one down weave. The lower fabric is formed of the fabric born warp yams interwoven with west yarns in a weave pattern which provides a weft yam dominated contact surface. Each of the fabric born warp yams also weaves over at least one of the upper fabric weft yarns during each repeat of the weave pattern forming binding points which bind the upper and lower fabrics together.

BEST AVAILABLE COPY

WO 2004/104295 A1 ||||||

WO 2004/104295

5

20

PCT/EP2004/050194

IAP20 Regid PST/FTO 18 NOV 2005

1

WARP BOUND COMPOSITE PAPERMAKING FABRIC

Background of the Invention

The present invention is directed to a composite papermaking fabric which is preferably used in the forming section but could also be used in the dryer section. The term composite fabric refers to a fabric comprising two woven structures one of which is the paper side fabric and the other of which is the machine side fabric or lower fabric. The paper side fabric includes a support surface which surface receives and supports the paper forming pulp during the paper forming operation. The lower or contact fabric separates the support fabric from the machine rollers during the paper forming operation and includes a roller contact or contact surface. Both fabrics must be stable and provide the required drainage. The support fabric must also provide an even support surface without unduly high knuckles or unduly deep knuckle depressions so as to not mark the paper during the paper forming operation.

The upper and lower fabrics are bound together with a binder yam which in the instant case comprises fabric born warp yam. The term fabric born warp yam indicates that the binder yam while binding the upper and lower fabrics together also weaves in the machine direction with and is an integral part of the weave pattern of both the upper and lower fabrics. The term warp yam refers to yams which weave in a single specified layer of the fabric and in the machine direction. The term weft yam refers to yams woven transverse of the warp yarns.

Composite papermaking fabrics are well known as are illustrated by the U.S.

Patents 5,152,326; 5,826,627; 6,202,705; and 6,240,973.

It is an object of the present invention to provide a composite papermaking fabric which provides uniform drainage, a smooth and even support surface and extended wear.

Another object of the invention is a papermaking fabric in which the support surface is formed in a one up, one down weave pattern.

Another object of the invention is a composite papermaking fabric in which fabric born warp yarns bind the upper and lower fabrics together and weave with weft yarns to form the lower fabric.

Another object of the invention is a composite papermaking fabric in which the west yarn of the upper fabric at the binding points are supported against downward movement.

Another object of the invention is the provision of a composite papermaking fabric in which no pairing of weft yarns appear on either surface.

Another object of the invention is the provision of a composite papermaking fabric in which no pairing of warp and fabric born warp yams appear on either surface.

Summary of the Invention

The present invention is directed to a composite papermaking fabric having an upper fabric which includes a fiber support surface and is formed of warp yarns, fabric born warp yarns and weft yarns. The support surface is woven in a one up, one down

3

weave pattern. The papermaking fabric also includes a lower fabric formed of fabric born warp yarms and weft yarms interwoven to provide a weft yarm dominated contact surface. Each fabric born warp yarm is controlled to weave over at least one of the upper fabric weft yarms during each repeat of the weave pattern forming binding points which act to bind the upper fabric with the lower fabric.

10

The preferred weave pattern requires that each fabric born warp yarn weave over two of the upper weft yarns: to form two binding points which are spaced longitudinally of the weave pattern. The binding points preferably form a broken twill line across the weave pattern and the width of the papermaking fabric. But it is also possible that the binding points form a straight twill line across the paperside weave pattern.

To insure that the support surface is even and smooth, the upper warp yams float beneath the upper weft yams at each of the binding points forming a support beneath the upper weft yams which acts to maintain knuckle height uniform across the support surface. The fabric born warp yams weave with the weft yarns of the lower fabric in preferably a broken twill pattern forming a plurality of even weft floats on the contact surface. There is a plurality of the weft yam floats formed by each lower weft yam per weave pattern repeat.

A composite papermaking fabric comprising an upper fabric formed with a support surface woven in a one up, one down weave pattern and a lower fabric formed with a weft dominated contact surface. The papermaking fabric comprises a plurality

4

of warp yams weaving with upper weft yams in a selected first weave pattern and a plurality of fabric born warp yams weaving with lower weft yams in a selected second weave pattern forming the lower fabric and weaving with the upper weft yams in the second selected weave pattern to cross over the upper weft yams at selected locations forming binding knuckles. The fabric born warp yams at the binding knuckles bind the upper fabric with the lower fabric. The binding knuckles cooperate with the knuckles of the warp yams weaving in the first weave pattern to form the support surface in a one up, one down weave pattern.

in the same of the

The warp yarms weave beneath each of the upper weft yarn at the selected locations forming the binding knuckles providing support beneath the upper weft yarn and the binding knuckle which support assists in maintaining the binding knuckles parallel with the remainder of the knuckles of the support surface.

The west yarn weaving with the fabric born warp yarns form the contact surface with two floats on the contact surface per pick throughout a weave pattern repeat.

20 Drawings

Fig 1 is a cutaway perspective view showing the support surface of the papermaking fabric through a portion of the weave pattern.

Fig 2 is a cutaway perspective view showing the contact surface of the papermaking fabric through a portion of the weave pattern.

5

Fig 3 is a side view showing the relationship of warp yarn 1 and fabric born warp yarn 2 with all of the weft yarns through the weave pattern.

Fig 4 is similar to Fig 3 showing the relationship of warp yarn 3 and fabric born warp yarn 4 with the west yarns through the weave pattern.

Fig 5 is similar to Fig 3 showing the relationship of warp yarn 5 and fabric born warp yarn 6 with the west yarns through the weave pattern.

Fig 8 is similar to Fig 3 showing the relationship of warp yarn 7 and fabric born warp yarn 8 with the west yarns through the weave pattern.

Fig 7 is similar to Fig 3 showing the relationship of warp yarn 9 and fabric born warp yarn 10 with the weft yarns through the weave pattern.

Fig 8 is similar to Fig 3 showing the relationship of warp yarn 11 and fabric bom warp yarn 12 with the west yarns through the weave pattern.

Fig 9 is similar to Fig 3 showing the relationship of warp yarn 13 and fabric bom warp yarn 14 with the weft yarns through the weave pattern.

Fig 10 is similar to Fig 3 showing the relationship of warp yarn 15 and fabric born warp yarn 16 with the west yarns through the weave pattern.

Fig 11 is a diagram of the weave pattern of the support surface.

Fig 12 is a diagram of the weave pattern of the contact surface.

Detailed Description

5

6

Turning now to the drawings Figs 1 and 2 represent sectional perspective views of the composite papermaking in which the upper fabric A is formed with a paper pulp support surface C as shown in Fig 1 and the lower contact fabric B which is formed with a lower roller contact surface D as shown in Fig 2. As shown in Fig 1 and further illustrated in Fig 11, upper fabric A and more specifically, support surface C is woven in a one up, one down weave pattern allowing the support surface to present an even array of warp knuckles separated on each side by a weft knuckle. This is best illustrated in Fig 11 where each O represents a warp yarn passing over a weft yarn on the support surface. Each passover forms a warp knuckle. Likewise, each weft yarn passing over a warp yarn on the support surface is represented by a blank square. These passovers form weft knuckles. Each O represents a binding point where the warp yarn passing over the weft yarn is an fabric born warp yarn.

The fabric is woven utilizing eight warp yarms numbered 1, 3, 5, 7, 9, 11, 13 & 15 and with eight fabric born warp yarms numbered 2, 4, 6, 8, 10, 12 & 16 per weave pattern repeat which is a so called 16 shaft weave. The present invention is not limited to the weave repeat shown in the figures. It's understood that the weave repeat in general can be 16 shaft or greater. Therefore the weave repeat could be for example a 20 shaft or a 24 shaft or a 28 shaft or a 32 shaft or a 40 shaft weave. The weave pattern repeat also weaves with forty weft yarms numbered 1-40. Weft yarms 2, 3, 5, 7, 8, 10, 11, 12, 13, 15, 17, 18, 20, 22, 23, 25, 27, 28, 30, 32, 33, 35, 37, 38 & 40 weave with the warp yarms and the fabric born warp yarms to form the upper or support

fabric A. Weft yams 1, 4, 6, 9, 11, 14, 16, 19, 21, 24, 26, 29, 31, 34, 36 & 39 weave only with the fabric born warp yam to form lower or contact fabric B.

Again turning to Figs 1, 2, 11 & 12. In Figs 1 & 11, the x represents the binding points or the positions in which an fabric born warp yam passes over an upper weft yam weaving with the support fabric A to bind the support fabric A with the contact fabric B forming the composite fabric. These binding points, which form binding knuckles 70, are identified in Figs 1 and 3-10.

Figs 3-10 are side views of each of the warp and fabric born warp yarns weaving with the weft yarns 1-40 through a complete repeat of the weave pattern. As can be seen in Figs 3 - 10 the ratio of upper weft yarns to lower weft yarns is 3:2. It is understood that this ratio is not limiting the scope of the invention, therefore the ratio exemplary also could be 2:1 or 5:3. As is clearly shown, warp yarns 1, 3, 5, 7, 9, 11, 13 & 15 weave only with weft yarns 2, 3, 5, 7, 8, 10, 12, 13, 15, 17, 18, 20, 22, 23, 25, 27, 28, 30, 32, 33, 35, 37, 38 & 40 forming support fabric A. The weave pattern at selected points brings the upper warp yarns to float beneath five consecutive of the upper weft yarn picks, such as warp yarn 1 at the pick of weft yarns 15, 17, 18, 20 & 22 in Fig 3 and warp yarn 5 at the pick of weft yarns 5, 7, 8, 10 and 12 in Fig 5. It is along these floats that the fabric born warp yarns are brought up to pass over two spaced picks, such as fabric born warp yarn 2 over picks 17 & 20 in Fig 3 and fabric born warp yarn 6 over picks 7 and 10 in Fig 5, binding upper fabric A with lower fabric B. Throughout the remainder of the weave pattern, each of the fabric born warp yarns

8

weaves with selected of the upper weft yams securing support fabric A with contact fabric B at the binding points illustrated in Fig 11 along each fabric born warp yam. The binding points form a broken twill pattern over the support surface. It has to be stated that the weave pattern of the support fabric A predominantly is created by the weaving of the warp yams 1, 3, 5, 7, ... with the upper (paper side) weft yams 2, 3, 5, 7, 8, 10, 11, 12, 13, 15, 17, 18, 20, 22, 23, 25, 27, 28, 30, 32, 33, 35, 37, 38 & 40 and that the weaving of the fabric born warp yams 2, 4, 6, 8, 10, 12 & 16 with the (paper side) weft yams gives a minor contribution to the weave pattern of the support fabric A. It can be stated that for the composite papermaking fabric according to the invention the warp yams weave during each repeat of said weave pattern with a predominant or major portion of the upper weft yams and that the fabric born warp yams weave only with a minor portion of the upper weft yams to form the upper fabric weave pattern. It is to be understood that a major portion means a portion of more that 50% and a minor portion means a portion of less than 50%.

By way of example as can be seen in Fig 3 warp yam 1 weaves with upper (paper side) weft yams 2, 3, 5, 7, 8, 10, 12, 13, 15, 22, 23, 25, 27, 28, 30, 32, 33, 35, 37, 38 & 40 a one up, one down weave pattern and floats beneath the upper (paper side) weft yams 17, 18, 20. The weave pattern of the support fabric A is completed by the weaving of the fabric born warp yam 2 with the weft yams 17, 18, 20.

20

9

In the weave pattern shown in Fig 3 warp yarn 1 weaves with seven times more (paper side) wefts than fabric born warp yarn 2.

5

Again, as seen in Figs 1 & 3-10 at each binding point 70, the associated upper warp yam passes beneath the pick where the binding point is formed with the fabric born warp yarn. In the above referred to example, warp 1 passes beneath weft yarn or picks 17 & 20 at binding points 70. Likewise in Flg 5 warp yarn or pick 5 passes beneath weft yams 7.8.10 at binding point 70. By so controlling the upper warp yams to be positioned beneath the binding points 70 they function to support the weft yarns $\dot{}$. and thereby the binding knuckles against vertical downward movement. As described previously the weave pattern of the support fabric A predominantly is formed by the weaving of the warp yams 2, 3, 5, 7, 8, 10, 11 ... In advanced studies applicant in general came to the conclusion that for creating a smooth and uniform support surface C it is necessary that the upper (paper side) weft yams which interweave with fabric born warp yarns or warp yarns and thereby only form a minor portion of the support fabric A need to be supported against vertical downward movement. Therefore, e.g. warp yarn 1 floats beneath (paper side) weft yarns 17, 18 & 20. This vertical support acts to help maintain the crest of the knuckles formed at binding points 70 elevated and on an even and substantially parallel plane with the remainder of the knuckles forming the support surface C. Also, by passing the upper warp yarns beneath the upper weft at the binding points no adjacent knuckles appear on the support surface at the binding points.

10

Turning now to Figs 2-10 & 12 contact fabric B will now be discussed. As seen in Figs 2 & 12 contact fabric B is woven in a broken twill pattern with each fabric born warp yarn passing beneath four weft yarns at spaced locations on contact surface D. Each fabric born warp yarn either floats above the lower weft yarns and beneath the warp and weft yarns of the upper or support fabric A or passes over the two of the upper picks forming binding points 70 throughout the remainder of each weave pattern as earlier discussed.

5

fabric B produces a weft dominated contact surface D with each weft weaving with the lower fabric warp yams to form two floats per pick throughout the weave pattern each of which passes beneath three warp yams. This weave pattern forms a weft yam dominated running or contact surface D.

The yams selected for forming the disclosed may comprise yams of the same diameter or of varying diameters if desired. For example, it may be desirable to weave the support fabric with weft yams of less size than the weft yams forming the contact fabric. The warp and the fabric born warp yams preferably are of the same size. Variation in yam size may be selected depending upon the performance requirements.

The materials chosen for the yams can vary depending upon the performance needs of the formed papermaking fabric. Generally stability is of the utmost importance, it being desired that the drainage capability be maintained throughout the life of the papermaking fabric. Also, wearability is another vital factor due to cost.

11

Accordingly, polyester yams which exhibit excellent stability characteristics may be selected to form the support surface and as the fabric born warp yams. The running or contact surface weft yams may all or partly be polyamide yams due to greater wearability characteristics. Also, the contact side weft yams may be of a larger diameter than the support fabric weft yarns. Other synthetic materials and size combinations may be selected to form the warp, weft, and fabric born warp yarns of the invention dependent upon the required performance needs of the fabric.

···.

What is claimed is:

A composite papermaking fabric comprising:

an upper fabric formed of warp yams, fabric born warp yams and upper weft yams interwoven to provide a support surface formed in a one up, one down weave pattern;

- a lower fabric formed of fabric born warp yems and lower weft yems interwoven to provide a weft yem dominated contact surface;
 - each said fabric born warp yarn weaving over at least one of said upper weft yarns during each repeat of said weave pattern forming binding points binding said upper fabric with said lower fabric.
- 2. The composite papermaking fabric of claim 1, wherein said warp yams weave during each repeat of said weave pattern with a major portion of said upper weft yams and wherein said fabric born warp yams weave only with a minor portion of said upper weft yams to form the upper fabric weave pattern.
 - 3. The composite papermaking fabric of claim 1 or claim 2 wherein each sald fabric born warp yarn weaves over at least two of sald upper west yarns forming two binding points spaced longitudinally of said weave pattern.
 - The composite papermaking fabric of any preceding claim wherein said binding points form a broken twill line across said weave pattern.
 - The composite papermaking fabric of any preceding claim wherein said
 upper warp yams float beneath said upper weft yams at said binding points forming

- supports for said weft yams at said binding points which act to maintain knuckle height uniform across said support surface.
 - 6. The composite papermaking fabric of any preceding claim wherein said fabric born warp yams weave with said weft yams of said lower fabric in a broken twill pattern forming a plurality of weft yams float on the contact surface.
- 7. The composite papermaking fabric of claim 6 wherein there are a plurality of said weft floats per lower fabric weft yarn per weave pattern repeat.
 - 8. The composite papermaking fabric of any preceding claim, wherein said weave pattern comprises equal numbers of said warp yarns and said fabric born warp yarns.
- 9. The composite papermaking fabric of any preceding claim wherein said weave pattern comprises eight of said warp yams, eight of said fabric born warp yams and forty of said weft yams per weave pattern repeat.
 - 10. The composite papermaking fabric of any preceding claim wherein the ratio of upper weft yams to lower weft is 2 : 1 or 3 : 2 or 5 : 3.
- 20 12. The composite papermaking fabric of any preceding claim wherein the weave repeat is at least 16 shaft weave repeat.
 - 13. A composite papermaking fabric comprising an upper fabric formed with a support surface woven in a one up, one down weave pattern and a lower fabric formed with a weft dominated contact surface;
- a plurality of warp yams weaving with upper weft yams in a selected first


14


weave pattern forming warp knuckles over said support surface;


a plurality of fabric born warp yarns weaving with lower weft yarns and said upper weft yarns in a selected second weave pattern;


said fabric born warp yarms and said lower weft yarms forming said lower fabric and said fabric born warp yarms and said upper weft yarms forming binding knuckles with said upper weft yarms at selected locations over said support surface, said binding knuckles binding said upper fabric with said lower fabric; and said binding knuckles cooperating with said warp knuckles of said support surface to form said support surface with said one up, one down weave pattern.


- 14. The composite papermaking fabric of claim 13 wherein said warp yarns weave beneath each said upper weft yarn at each of said selected locations beneath providing vertical support for said upper weft yarn and said binding knuckle.
 - 15. The composite papermaking fabric of claim 13 or claim 14 wherein said weft yarn of said contact surface form two floats per pick per weave pattern repeat.
- The composite papermaking fabric of any preceding claim wherein the
 wearside fully or partially consists of wear resistant yarns.

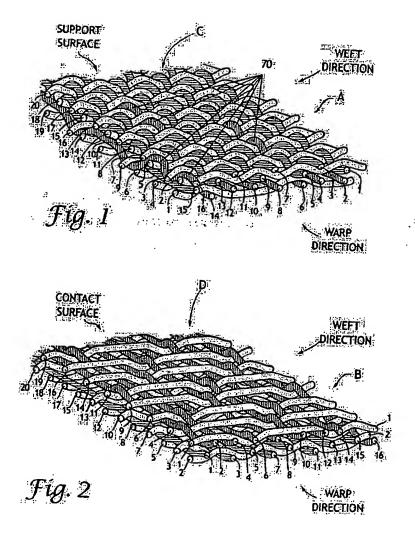


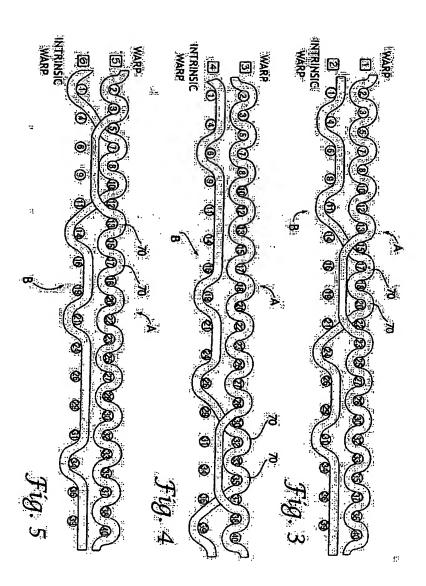

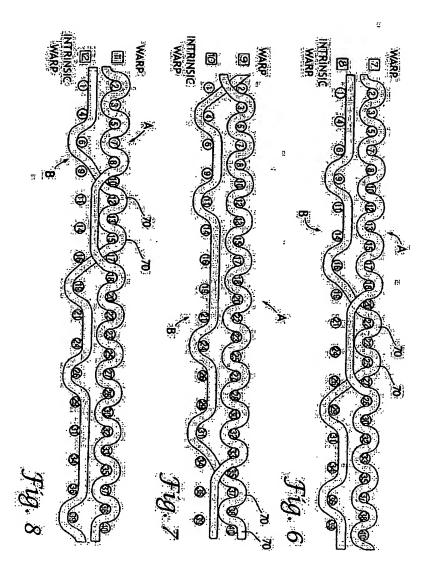

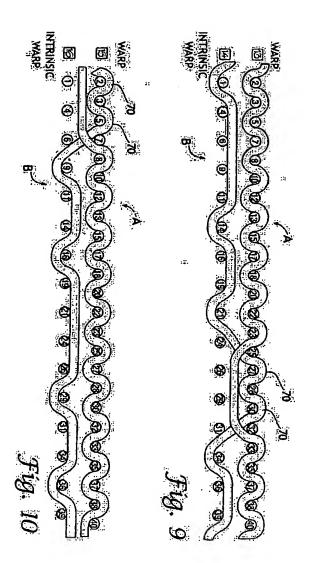

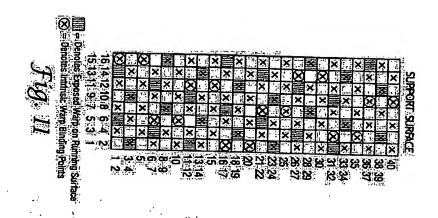

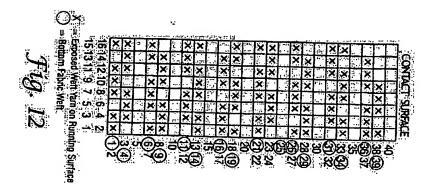

International Application No
PCT/FP2004/050194

			1017 E1 20047 030134	
A. CLASSII IPC 7	FICATION OF SUBJECT MATTER D21F1/00			
According to	International Patent Classification (IPC) or to both national classifica	ation and IPC		
B. FIELDS	SEARCHED			
	Minimum documentation searched (classification system followed by classification symbols)			
	ion searched other than minimum documentation to the extent that s			
Electronic da	ata base consulted during the international search (name of data bas	se and, where practical	search terms used)	
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT			
Category *	Citation of document, with indication, where appropriate, of the rela	evant passages	Relevant to claim No.	
A	US 5 152 326 A (VOEHRINGER FRITZ) 6 October 1992 (1992-10-06) cited in the application column 4, line 48 - column 5, lin figures 2-5		1,13	
Funt	ner documents are listed in the continuation of box C.	X Patent family r	nembers are listed in annex.	
'A' document defining the general state of the art which is not considered to be of particular relevance invention 'E' earlier document but published on or after the international filing date 'L' document which may throw doubts on priority claim(s) or involve an which is cited to establish the publication date of another citation or other special reason (as specified) 'O' document referring to an oral disclosure, use, exhibition or other means 'P' document published prior to the international filing date but tater than the priority date claimed '&' document '** document		or priority date and cited to understand invention "X" document of partice cannot be consided involve an invention "Y" document of partice cannot be consided document is comment in the art. "8" document member	ocument of particular relevance; the claimed Invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone ocument of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled	
	16 July 2004		26/07/2004	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Helpiö, T.		

information on patent family members

International Application No
PCT/EP2004/050194

Patent document cited in search report	Publica dati		Patent family member(s)	Publication date
US 5152326	A 06-1	0-1992 DE AT DE EP ES	3938159 A1 107979 T 59006308 D1 0432413 A1 2057318 T3	23-05-1991 15-07-1994 04-08-1994 19-06-1991 16-10-1994

REVISED VERSION

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 2 December 2004 (02,12,2004)

PCT

(10) International Publication Number WO 2004/104295 A1

(51) International Patent Classification⁷:

D21F 1/00

(21) International Application Number:

PCT/EP2004/050194

(22) International Filing Date: 24 February 2004 (24.02.2004)

(25) Filing Language:

English

(26) Publication Language:

43, 89522 Heidenheim (DE).

English

(30) Priority Data:

10/443,474 2,440,263 22 May 2003 (22.05.2003) US 9 September 2003 (09.09.2003) CA

(71) Applicant (for all designated States except US): VOITH FABRIC PATENT GMBH [DE/DE]; St. Poeltener Str.

(72) Inventors: and

(75) Inventors/Applicants (for US only): QUIGLEY, Scott [US/US]; 108 Paradise Circle, Townville, SC 29689 (US). BREWSTER, James [US/US]; 159 Private Road, Waskom, TX 1139 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the revised international search report: 20 January 2005
- (15) Information about Correction: see PCT Gazette No. 03/2005 of 20 January 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WARP BOUND COMPOSITE PAPERMAKING FABRIC

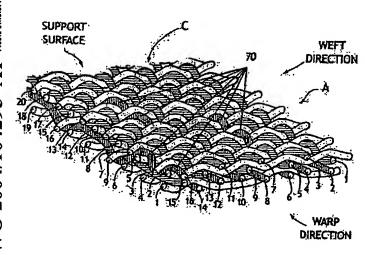

(57) Abstract: A composite papermaking fabric comprising an upper support fabric and a lower contact fabric. The upper fabric is formed of warp yams, fabric born warp yams and weft yams interwoven to provide the upper fabric with a support surface forming a one up, one down weave. The lower fabric is formed of the fabric born warp yams interwoven with west yams in a weave pattern which provides a weft yam dominated contact surface. Each of the fabric born warp yams also weaves over at least one of the upper fabric weft yarns during each repeat of the weave pattern forming binding points which bind the upper and lower fabrics together.

Internati pplication No PCT/EP2004/050194

A. CLASSI IPC 7	FICATION OF SUBJECT MATTER D21F1/00	· · · · · · · · · · · · · · · · · · ·		
	•			
According to	o International Patent Classification (IPC) or to both national classifica	tion and IPC		
1	SEARCHED			
IPC 7	ocumentation searched (classification system followed by classification D21F	in symbols)	•	
Documenta	tion searched other than minimum documentation to the extent that se	uch documents are included in the fields sea	urched	
1	ata base consulted during the international search (name of data base	e and, where practical, search terms used)		
EPO-In	ternal			
C DOCUM	ENTS CONSIDERED TO BE RELEVANT			
Category °	Citation of document, with indication, where appropriate, of the rele	evant passages	. Relevant to claim No.	
А	US 5 152 326 A (VOEHRINGER FRITZ) 6 October 1992 (1992-10-06)		1,12	
	cited in the application			
	column 4, line 48 - column 5, lin figures 2-5	ne 63;		
			:	
			•	
		·		
Funt	ner documents are listed in the continuation of box C.	X Patent family members are listed in	annex.	
• Special categories of cited documents :				
"T" later document published after the international filing date or priority date and not in conflict with the application but			he application but	
considered to be of particular relevance "E" earlier document but published on or after the International "Y" document of particular relevance the defined inventors.				
filing date "L" document which may throw doubts on priority claim(s) or "L" document which may throw doubts on priority claim(s) or involve an inventive step when the		be considered to ument is taken alone		
which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such docu-				
occument referring to an oral disclosure, use, exhibition or document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.			s to a person skilled	
later than the priority date claimed		"&" document member of the same patent fa		
Date of the actual completion of the international search		Date of mailing of the International search	ch report	
2:	2 November 2004	2 5. 11. 2004		
Name and m	nailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2	Authorized officer		
	NL - (+31-70) 340-2040, Tx. 31 651 epo nl,	Unlais T		
Fax: (+31-70) 340-2040, 1x. 31 651 epo ni,		Helpiö, T.		

Internatic iplication No PCT/EP2004/050194

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5152326	A	06-10-1992	DE AT DE EP ES	3938159 A1 107979 T 59006308 D1 0432413 A1 2057318 T3	23-05-1991 15-07-1994 04-08-1994 19-06-1991 16-10-1994

Form PCT/ISA/210 (patent family annex) (January 2004)

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.